



11-12 BAR PAINTED VERTICAL AIR VESSELS

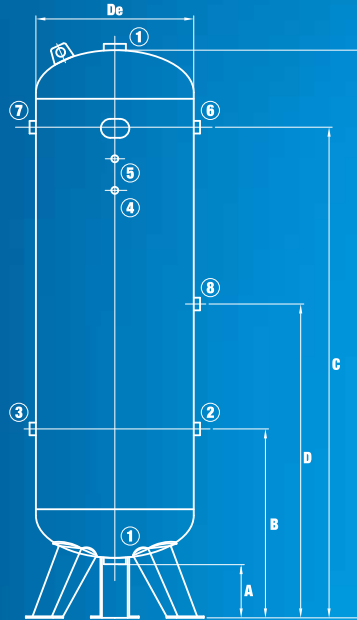

Directive	2009/105/EC	97/23/EC (PED)
Operating pressure	11 Bar	12 Bar
Operating temperature	-10+100°C	-10+50°C

- Material: carbon steel
- Fluid content: compressed air / nitrogen (Group 2)
- Finishing: external Ral 5015 blue paint (standard)

CODE	Directive	Capacity	Operating pressure	De	A	B	C	D	L	1	2	3	4	5	6	7	8	Weight
RAL 5015		Lt	Bar	mm	mm	mm	mm	mm	mm	inch	inch	inch	inch	inch	inch	inch	inch	Kg
VEC01866	2009/105/EC	90	11	370	180	348	968	-	1126	1/2"	3/4"	-	3/8"	3/8"	-	3/4"	-	29
VEC00644	2009/105/EC	100	11	370	180	355	1055	-	1213	1/2"	3/4"	-	3/8"	3/8"	-	3/4"	-	31
VEC00709	2009/105/EC	150	11	396	170	385	1210	-	1430	1/2"	1"	-	3/8"	3/8"	-	1"	-	44
VEC00645	2009/105/EC	200	11	446	175	400	1225	-	1557	1/2"	1"	-	3/8"	3/8"	-	1"	-	55
VEC02071	2009/105/EC	200	11	446	175	400	1225	-	1557	2"	1"	-	3/8"	3/8"	-	1"	-	55
VEC00478	2009/105/EC	270	11	500	175	599	1304	-	1648	1/2"	1"	1"	-	3/8"	1"	-	-	67
VEC00795	2009/105/EC	270	11	500	175	599	1304	-	1648	2"	1"	1"	-	3/8"	1"	-	-	67
VEC00493	2009/105/EC	500	11	600	155	785	1665	-	2050	1/2"	1"	1"	-	3/8"	1"	1"	-	115
VEC00370	2009/105/EC	500	11	600	155	785	1665	-	2050	2"	2"	2"	-	3/8"	2"	2"	-	116
VEC00507	2009/105/EC	720	11	750	135	880	1705	-	2030	2"	1"	1"	3/8"	3/8"	1"	1"	-	178
VEC00510	2009/105/EC	720	11	750	135	880	1705	-	2030	2"	2"	2"	3/8"	3/8"	2"	2"	-	178
VEC00511	2009/105/EC	900	11	800	145	875	1805	-	2140	2"	1 1/2"	1 1/2"	3/8"	3/8"	1 1/2"	1 1/2"	-	194
VEC00518	97/23/EC (PED)	1000	12	800	145	770	1720	-	2350	2"	2"	2"	3/8"	3/8"	2"	2"	-	210
VEC00525	97/23/EC (PED)	1500	12	1000	170	680	1780	-	2305	2"	2"	2"	1/2"	1/2"	2"	2"	-	320
VEC00528	97/23/EC (PED)	2000	12	1100	200	770	1970	-	2490	2"	2"	2"	1/2"	1/2"	2"	2"	-	388
VEC00530	97/23/EC (PED)	2000	12	1100	200	770	1970	-	2490	2"	3"	3"	1/2"	1/2"	3"	3"	-	390
VEC00535	97/23/EC (PED)	3000	12	1200	140	830	2250	1540	2990	2"	2"	2"	1/2"	1/2"	2"	2"	2"	594
VEC01360	97/23/EC (PED)	3000	12	1200	140	830	2250	1540	2990	2"	3"	3"	1/2"	1/2"	3"	3"	3"	596

ACCESSORIES

CODE	Unit	Description	Material	Directive	Calibration	Drain flow rate
KIT00024	1 1	Safety valve with G 1/2" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	11 Bar 11 Bar	7237 Lt/min
KIT00100	1 1 1	Safety valve with G 3/4" connection Ø 63 mm G 1/4" pressure gauge G 1/2" ball tap	BRASS	97/23/EC (PED)	11 Bar 11 Bar	17767 Lt/min
KIT00093	1 1 1	Safety valve with G 1" connection Ø 63 mm G 1/4" pressure gauge G 1" ball tap	BRASS	97/23/EC (PED)	11 Bar 11 Bar	38221 Lt/min
KIT00026	1 1 1	Safety valve with G 3/4" connection Ø 63 mm G 1/4" pressure gauge G 1/2" ball tap	BRASS	97/23/EC (PED)	12 Bar 12 Bar	19184 Lt/min
KIT00028	1 1 1	Safety valve with G 1" connection Ø 63 mm G 1/4" pressure gauge G 1" ball tap	BRASS	97/23/EC (PED)	12 Bar 12 Bar	41407 Lt/min
KIT00114	1 1	Safety valve with G 1/2" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	15 Bar 15 Bar	9650 Lt/min
KIT00031	1 1	Safety valve with G 1/2" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	16 Bar 16 Bar	10253 Lt/min
KIT00088	1 1	Safety valve with G 3/4" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	16 Bar 16 Bar	24851 Lt/min
KIT00023	1 1	Safety valve with G 1" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	16 Bar 16 Bar	54147 Lt/min
KIT00040	1 1	Safety valve with G 1/2" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	21 Bar 25 Bar	16517 Lt/min
KIT00105	1 1	Safety valve with G 1/2" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	32 Bar 32 Bar	24811 Lt/min
KIT00106	1 1	Safety valve with G 1" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	32 Bar 32 Bar	103110 Lt/min
KIT00107	1 1	Safety valve with G 1/2" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	42 Bar 42 Bar	32350 Lt/min
KIT00087	1 1	Safety valve with G 1" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	42 Bar 42 Bar	134442 Lt/min
KIT00030	1 1	Safety valve with G 1/2" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	8 Bar 8 Bar	5419 Lt/min
KIT00102	1 1	Safety valve with G 1" connection Ø 63 mm G 1/4" pressure gauge	BRASS	97/23/EC (PED)	8 Bar 8 Bar	28666 Lt/min
KIT00044	1 1	Safety valve with G 1/2" connection Ø 63 mm G 1/4" pressure gauge	STAINLESS STEEL 316L STAINLESS STEEL	97/23/EC (PED)	11 Bar 11 Bar	8983 Lt/min
KIT00103	1 1	Safety valve with G 1" connection Ø 63 mm G 1/4" pressure gauge	STAINLESS STEEL 316L STAINLESS STEEL	97/23/EC (PED)	11 Bar 11 Bar	37317 Lt/min
ART00122	1	Pressure gauge flange with G 3/8" connection	BRASS	-	-	-



PRESSURE GAUGE
Ø 63 mm G 1/4"



PRESSURE GAUGE
FLANGE
G 3/8"



BALL TAP
G 1/2" - G 1"



SAFETY VALVE
WITH G 1/2"
CONNECTION



SAFETY VALVE
WITH G 1"
CONNECTION



SAFETY VALVE
WITH G 3/4"
CONNECTION



SAFETY VALVE
WITH G 1/2"
CONNECTION



SAFETY VALVE
WITH G 1"
CONNECTION